

EQUIPMENT



BTF-040

STANDARD FEATURES

- Automatic bowl locking system
- Tools with opposite rotation and translation
- Digital control has 20 speeds with 7 recipes
- Incorporated wheels for easier handling
- Whisk with upper & lower cover in DIN POM C
- Stainless steel bowl & grid (AISI304)
- Stainless steel spiral hook and paddle (AISI304)
- Stainless steel security bars (AISI304)
- Planetary with alimentary lubricant
- Stainless steel tool holder
- Silent & efficient transmission via "V" belts
- Electronic speed variation
- Easy to fix
- Embroidered with CE mark


AVAILABLE OPTIONS

- Fully stainless
- Analog control panel
- Touchscreen
- Hub attachment
- Reduction kit
- Removable security bars
- Bowl trolley
- Automatic bowl lifting

BTF-040

Technical Data

| Motor | Low speed: 1.5kW 2 HP High speed: 2.2kW 3HP |
|-----------------------------|-----------------------------------------------------|
| Emulsion | 10L (12L creams with, 20L creams w/o) |
| Electrical | 230/50/60/1 or 400/50/60/3 |
| Flour capacity | 8 Kg (17.64 lbs.) |
| Bowl volume | 40L |
| Housing/Material | Zinc coated epoxy painted carbon steel |
| Short crust pastry capacity | 12 Kg (26.46 lbs) |
| Lifting power (Hub) | 0.25kW (0.55kW) |
| Dimensions (L x W x H) | 950 mm x 600 mm x 1340 mm (37.4" x 23.62" x 52.76") |
| Net weight | 203 Kg (447.54 lbs) |
| | |

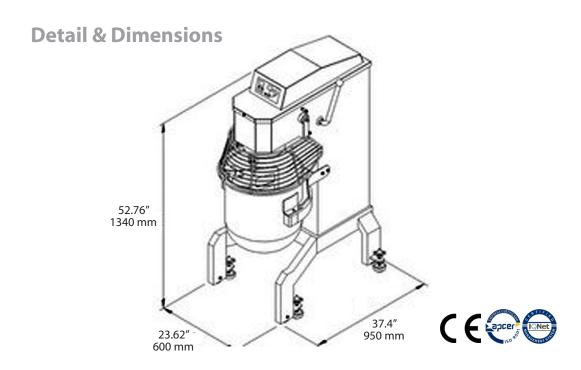

 $As continued \ product \ improvement \ is \ a \ policy \ of \ Powerline, specifications \ are \ subject \ to \ change \ without \ notice.$



POWERLINE EQUIPMENT COMPANY