



STAINLESS STEEL COMMERCIAL FAUCETS



HIGH QUALITY, HIGH VALUE EQUIPMENT SINCE 1993

POWERLINE EQUIPMENT COMPANY

Pulaski Street, Norwalk, CT 06851 USA

www.powerlineequip.com



STAINLESS STEEL PRE-RINSE LINE




P113-B-SS

Single Hole Deck Mount Pre Rinse Faucet

1. **Temperature Control:** Dual-handle, dual-control for hot and cold adjustment
2. **Hole Size:** Φ 32-35 mm
3. **Body Material, Valve Core, Overhead Spring:** 304 S/S
4. **Spray Valve:** Available in Stainless Steel Dual function or Single-function Options
5. **Hose:** Stainless Steel 360° Rotating and Universal Ball Joint (925 mm)

P113-B-SS

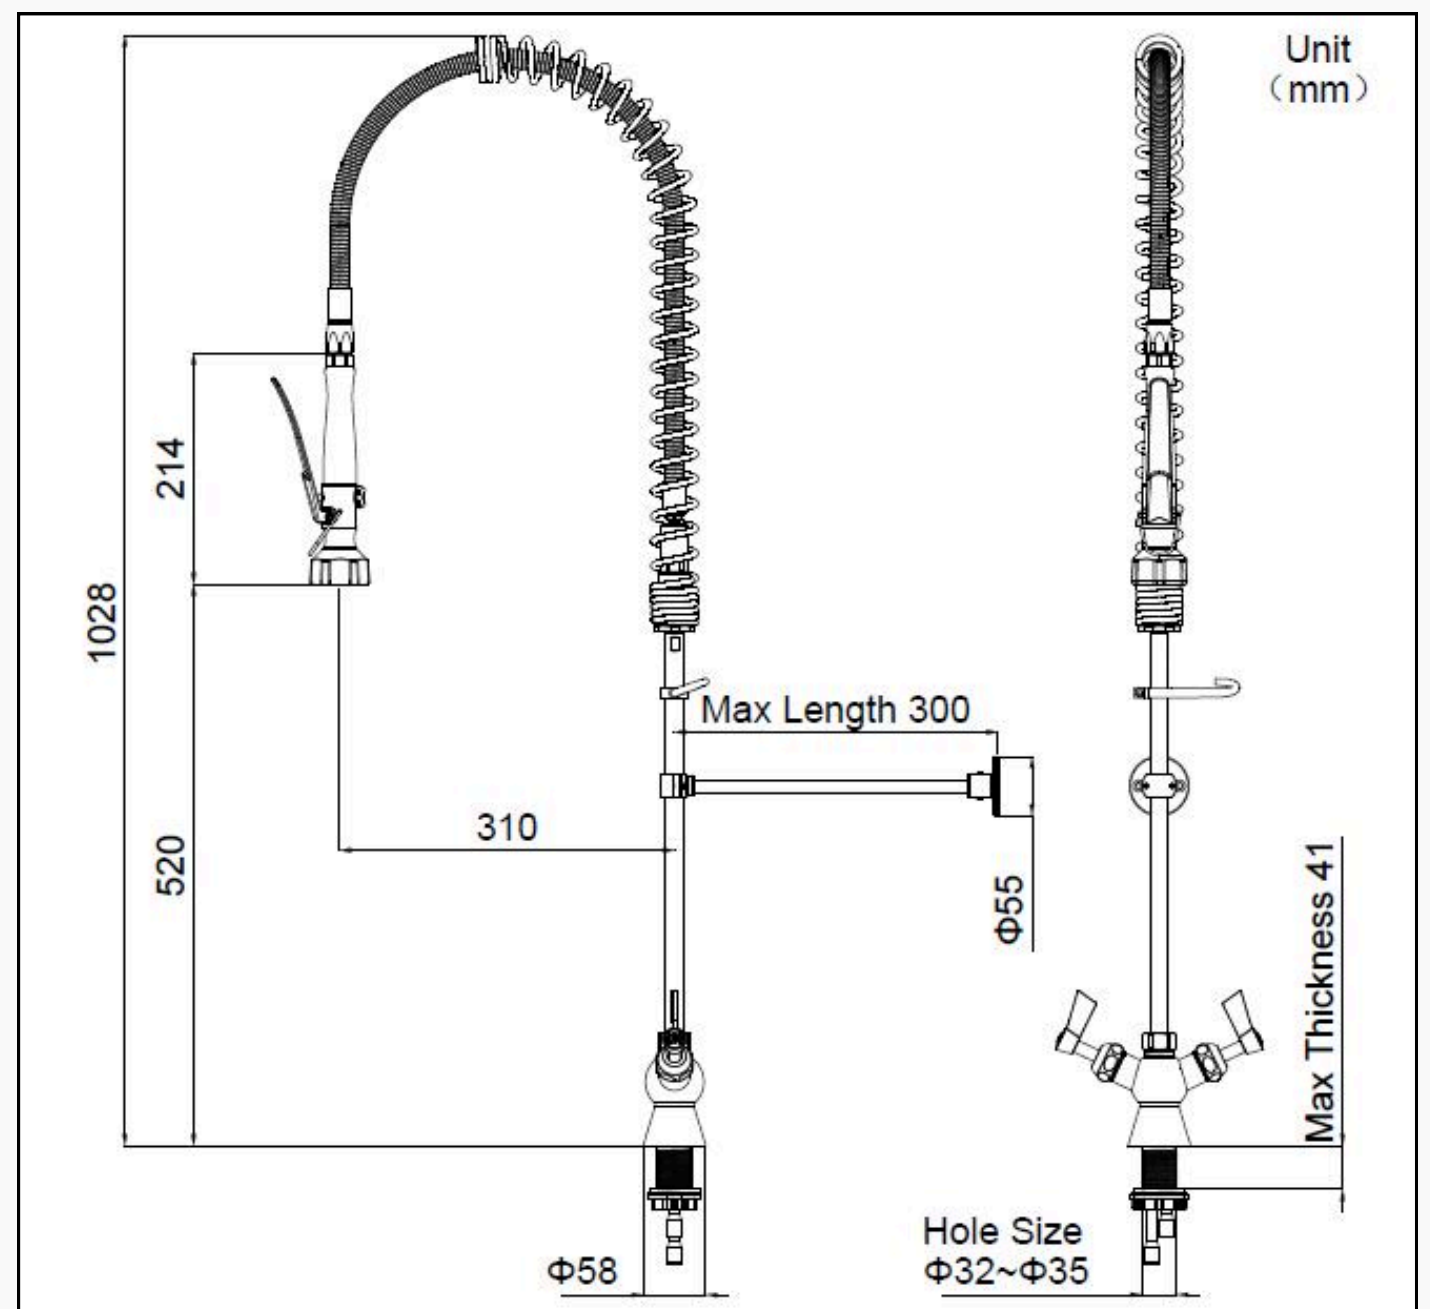

6. **Neoperl Aerator Water Flow:** Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) options
7. **Wall Bracket:** Adjustable Range 300 mm
8. **Temperature Max:** 95°C(203°F)
9. **Pressure Max:** 2.5 Mpa (25 Bar)
10. **Life Span:** 200,000+ Cycles




P-0113-ADF12-SS

Single Hole Deck Mount Pre Rinse Faucet

1. **Add-on Swing Nozzle:** 12 inches (304.8 mm)
2. Also available with 8" and 10" swing nozzles
3. **Temperature Control:** Dual-handle, dual-control for hot and cold adjustment
4. **Hole Size:** Φ 32-35 mm
5. **Body Material, Valve Core, Overhead Spring:** 304 S/S
6. **Spray Valve:** Available in Stainless Steel Dual function or Single-function Options


P-0113-ADF12-SS

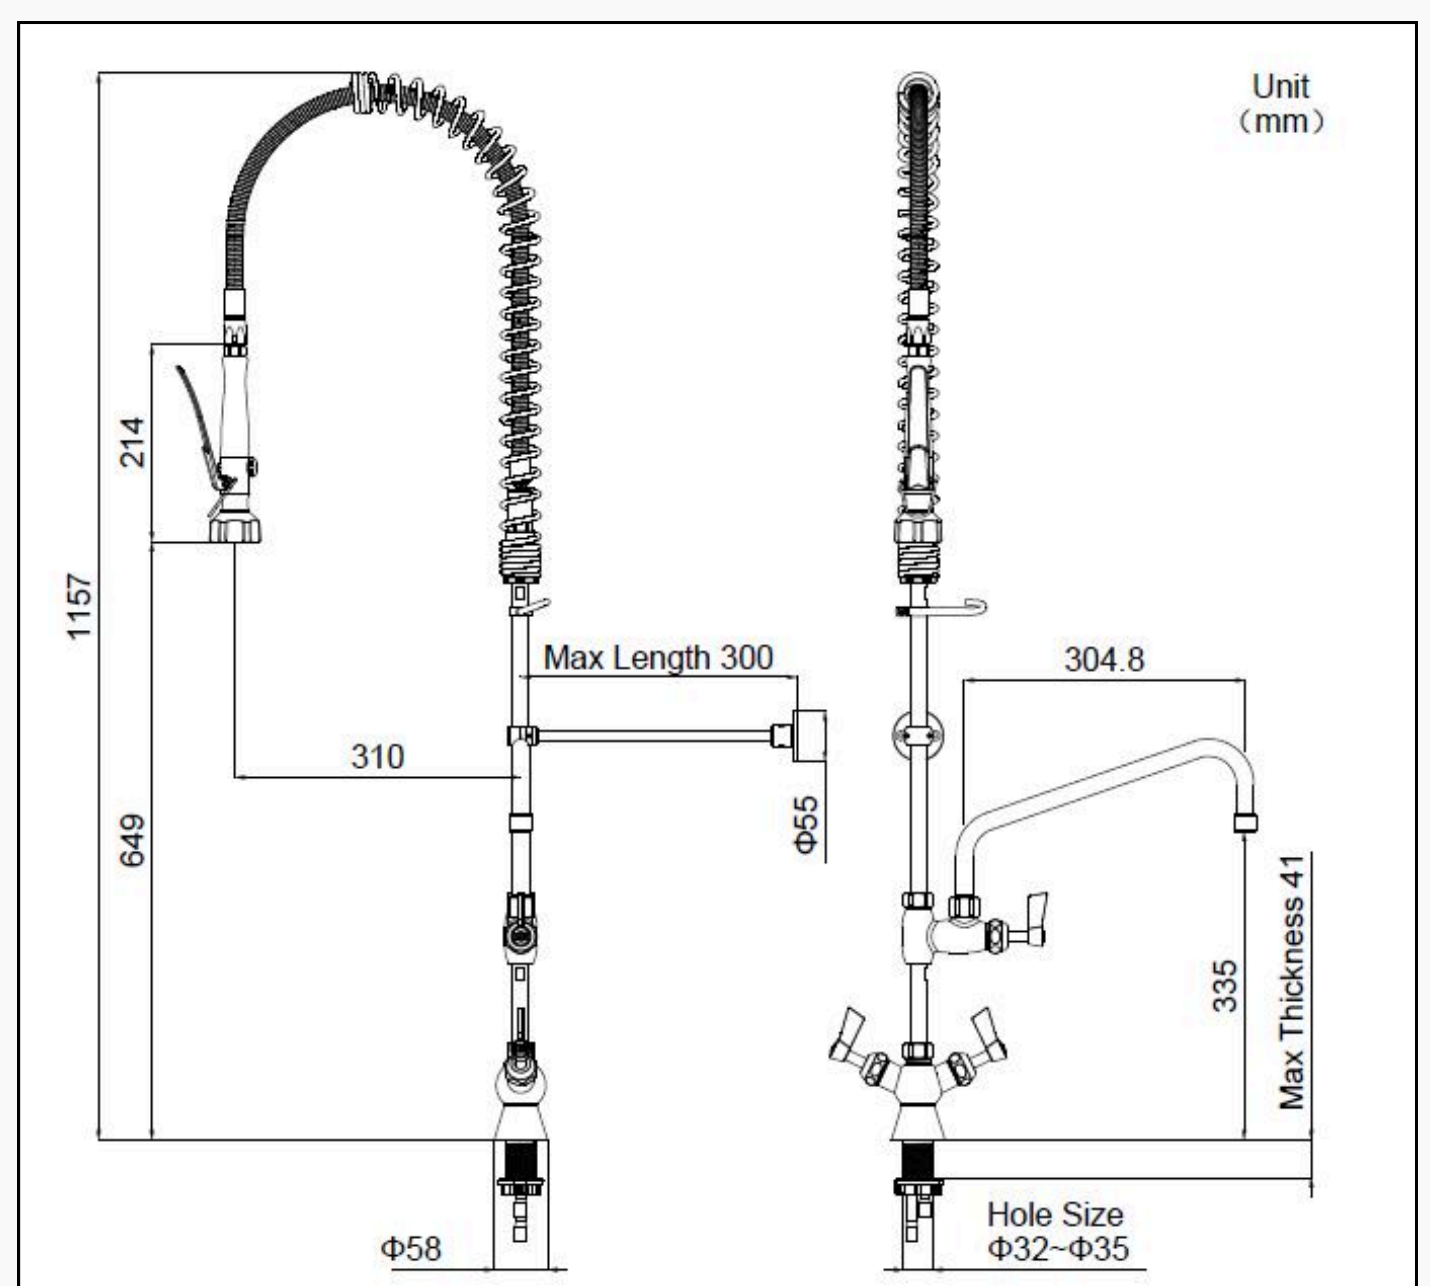

7. **Hose:** Stainless Steel 360° Rotating and Universal Ball Joint (925 mm)
8. **Neoperl Aerator Water Flow:** Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) options
9. **Wall Bracket:** Adjustable Range 300 mm
10. **Temperature Max:** 95°C(203°F)
11. **Pressure Max:** 2.5 Mpa (25 Bar)
12. **Life Span:** 200,000+ Cycles




STAINLESS STEEL PRE-RINSE LINE

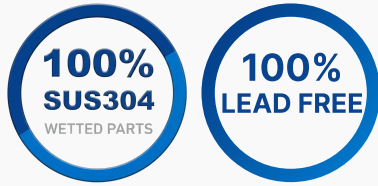

P-123-B-SS

Dual Holes Deck Mount Pre Rinse Faucet

1. **Temperature Control:** Dual-handle, dual-control for hot and cold adjustment
2. **Hole Size:** Φ 21-23 mm, Hole-to-hole Dimension 4" (101.6 mm)-8" (203.2mm)
3. **Body Material, Valve Core, Overhead Spring:** 304 S/S
4. **Spray Valve:** Available in Stainless Steel Dual function or Single-function Options
5. **Hose:** Stainless Steel 360° Rotating and Universal Ball Joint (925 mm)

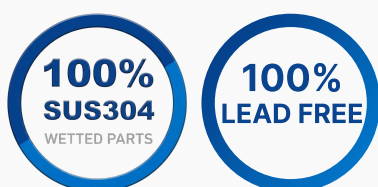


P-123-ADF12-B-SS

Dual Holes Deck Mount Pre Rinse Faucet


1. **Add-on Swing Nozzle:** 12 inches (304.8 mm)
2. Also available with 8" and 10" swing nozzles
3. **Temperature Control:** Dual-handle, dual-control for hot and cold adjustment
4. **Hole Size:** Φ 21-23 mm, Hole-to-hole Dimension 4"(101.6 mm)-8" (203.2 mm)
5. **Body Material, Valve Core, Overhead Spring:** 304 S/S
6. **Spray Valve:** Available in Stainless Steel Dual function or Single-function Options

P-123-B-SS

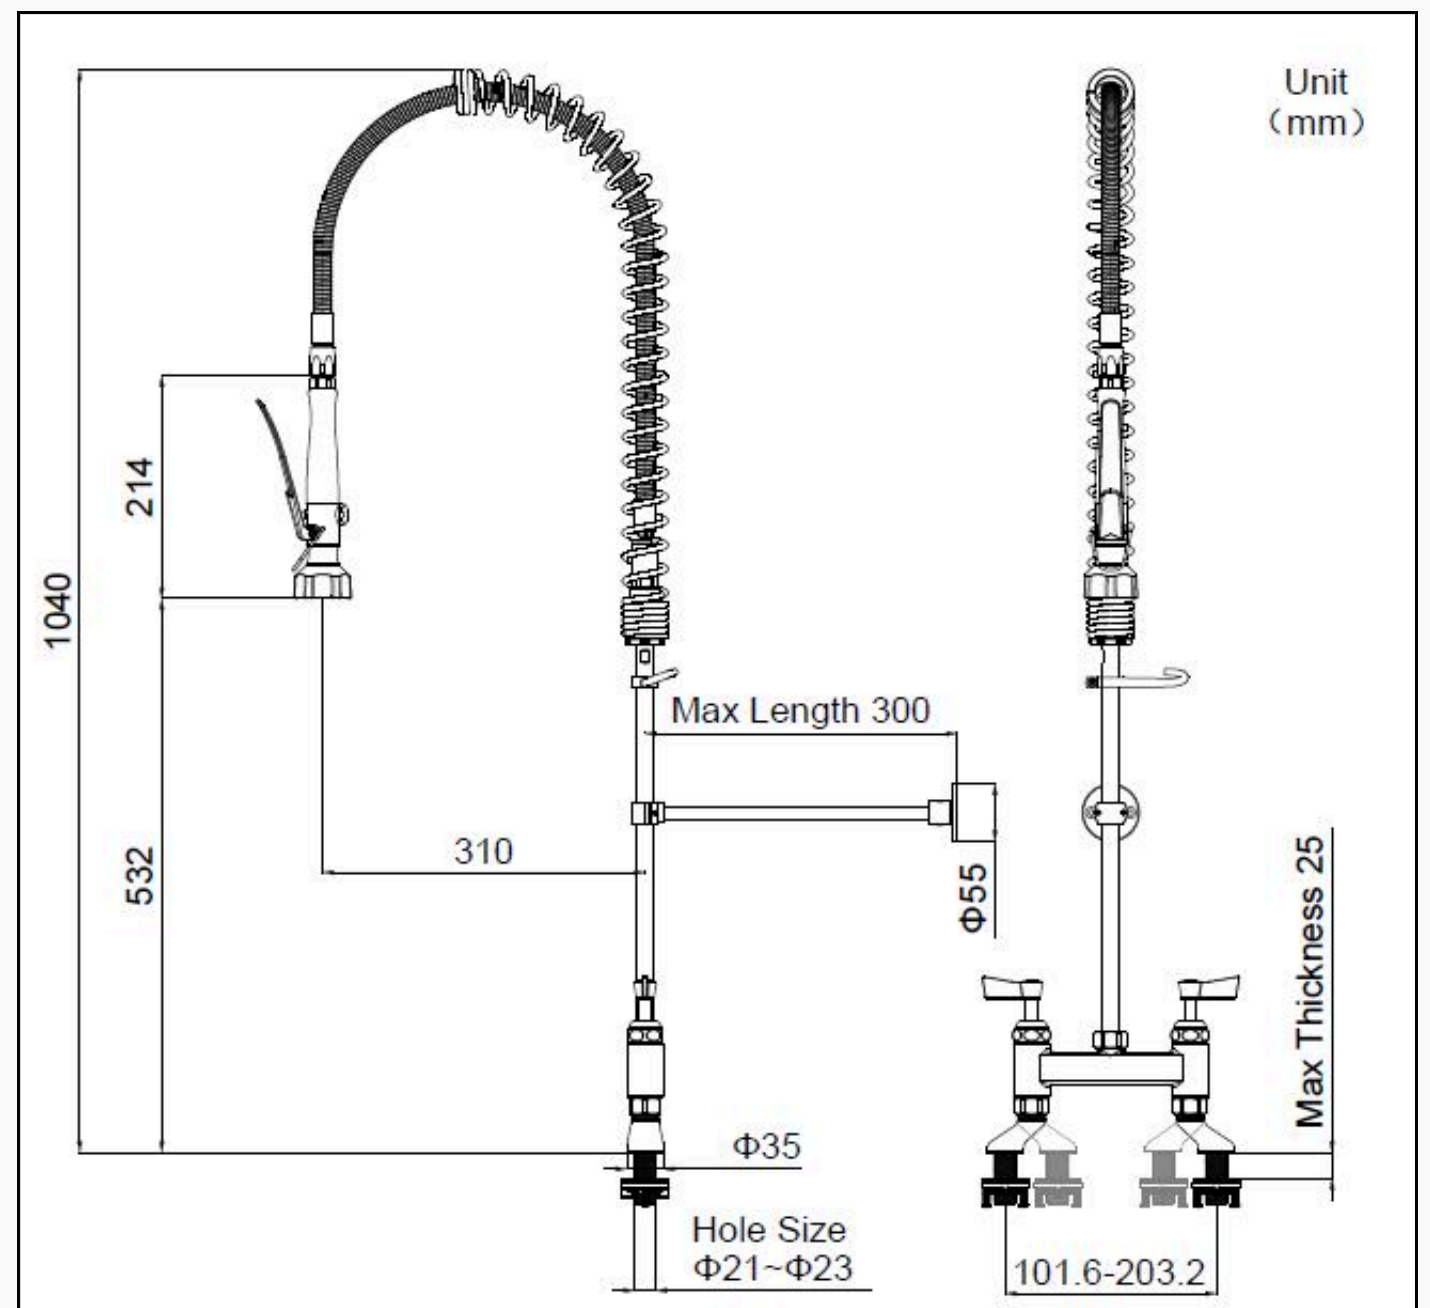

6. **Neoperl Aerator Water Flow:** Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) options
7. **Wall Bracket:** Adjustable Range 300 mm
8. **Temperature Max:** 95°C(203°F)
9. **Pressure Max:** 2.5 Mpa (25 Bar)
10. **Life Span:** 200,000+ Cycles


P-123-ADF12-B-SS

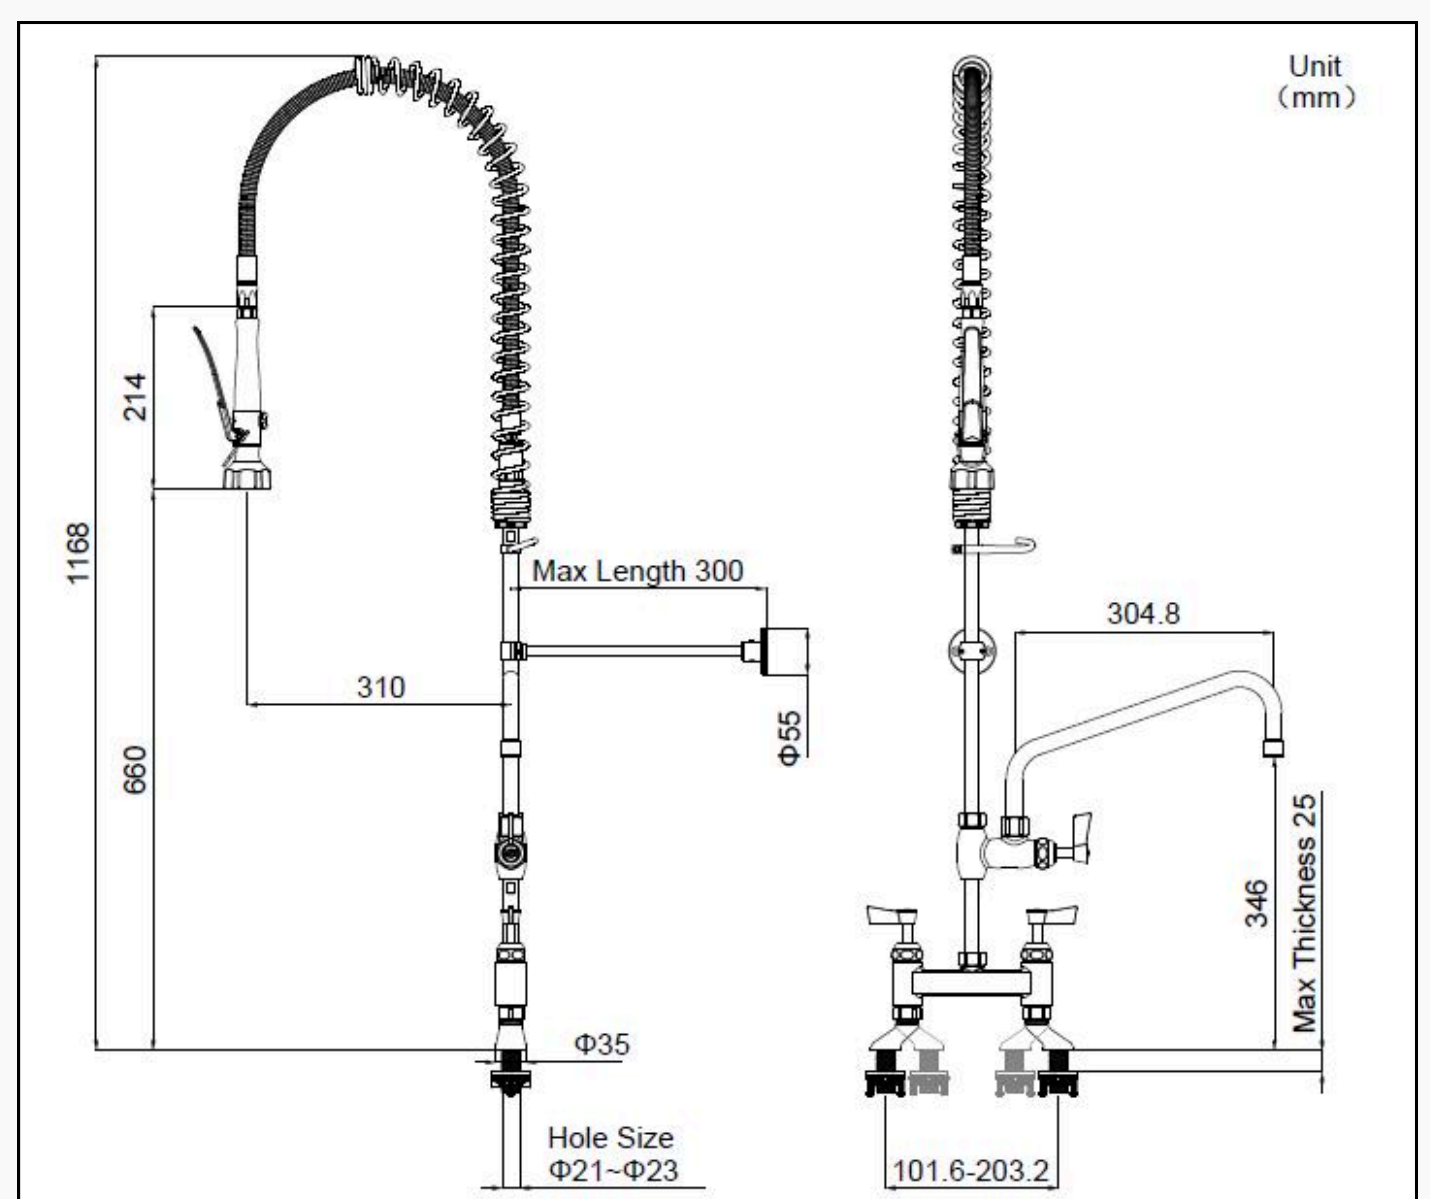


7. **Hose:** Stainless Steel 360° Rotating and Universal Ball Joint (925 mm)
8. **Neoperl Aerator Water Flow:** Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) options
9. **Wall Bracket:** Adjustable Range 300 mm
10. **Temperature Max:** 95°C(203°F)
11. **Pressure Max:** 2.5 Mpa (25 Bar)
12. **Life Span:** 200,000+ Cycles



STAINLESS STEEL PRE-RINSE LINE

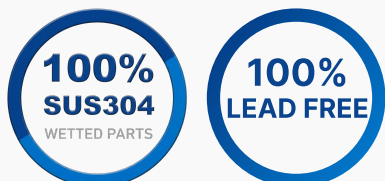

P-2285-B-SS

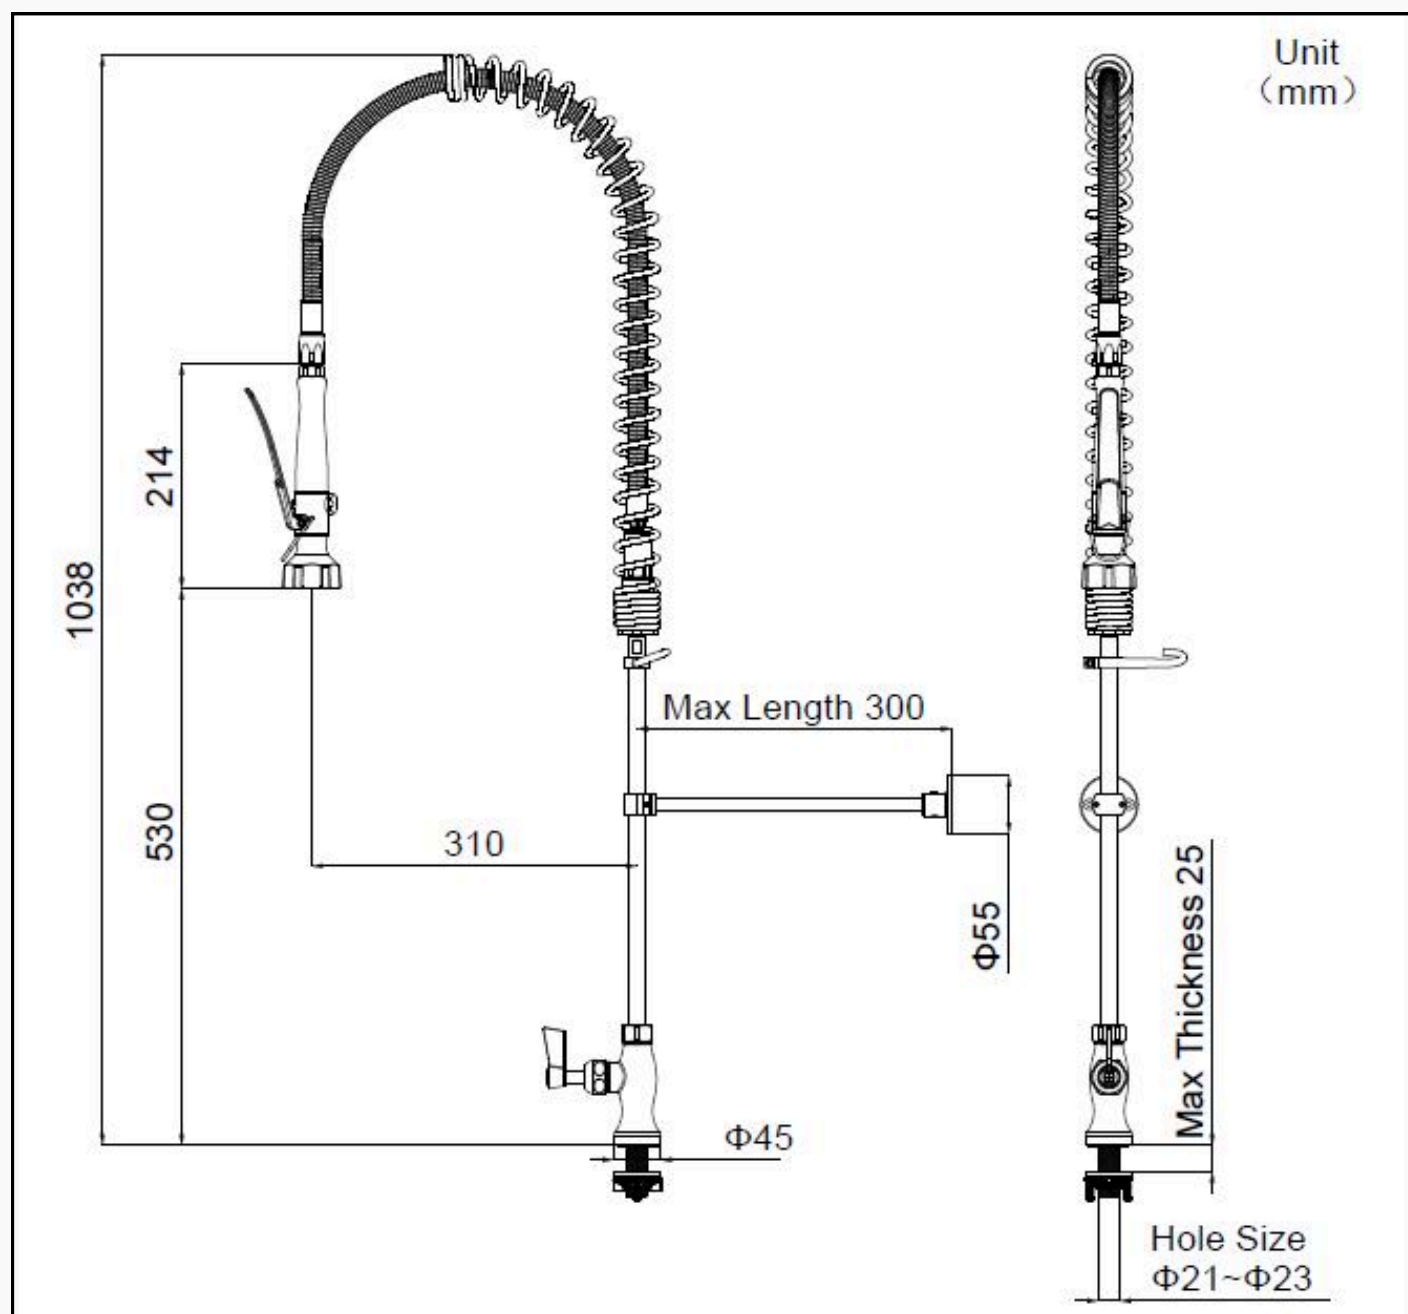

P-2285-B-SS


Single Hole Deck Mount Pre Rinse Faucet

1. **Temperature Control:** Single-handle, single-control for cold water only
2. **Hole Size:** Φ 21-23 mm
3. **Body Material, Valve Core, Overhead Spring:** 304 S/S
4. **Spray Valve:** Available in Stainless Steel Dual function or Single-function Options
5. **Hose:** Stainless Steel 360° Rotating and Universal Ball Joint (925 mm)

6. **Neoperl Aerator Water Flow:** Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) options
7. **Wall Bracket:** Adjustable Range 300 mm
8. **Temperature Max:** 95°C(203°F)
9. **Pressure Max:** 2.5 Mpa (25 Bar)
10. **Life Span:** 200,000+ Cycles



P-2285-ADF12-B-SS

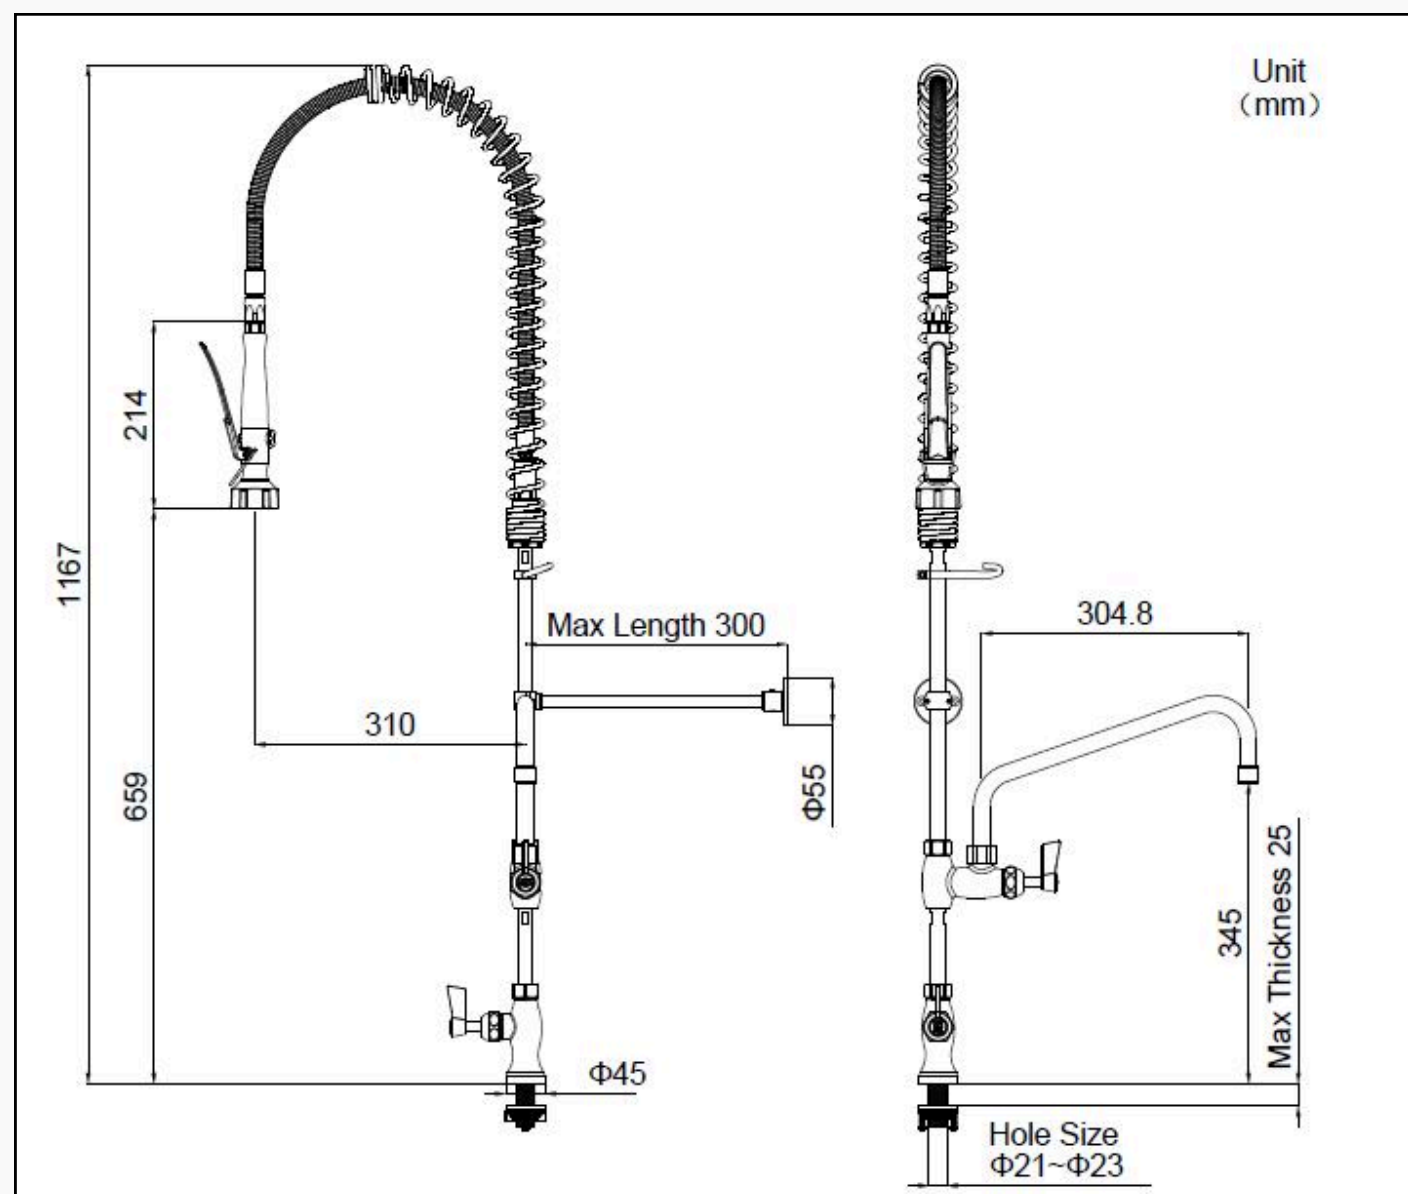

P-2285-ADF12-B-SS

Single Hole Deck Mount Pre Rinse Faucet

1. **Add-on Swing Nozzle:** 12 inches (304.8 mm)
2. Also available with 8" and 10" swing nozzles
3. **Temperature Control:** Single-handle, single-control for cold water only
4. **Hole Size:** Φ 21-23 mm
5. **Body Material, Valve Core, Overhead Spring:** 304 S/S
6. **Spray Valve:** Available in Stainless Steel Dual function or Single-function Options

7. **Hose:** Stainless Steel 360° Rotating and Universal Ball Joint (925 mm)
8. **Neoperl Aerator Water Flow:** Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) options
9. **Wall Bracket:** Adjustable Range 300 mm
10. **Temperature Max:** 95°C(203°F)
11. **Pressure Max:** 2.5 Mpa (25 Bar)
12. **Life Span:** 200,000+ Cycles




STAINLESS STEEL PRE-RINSE LINE



100%
SUS304
WETTED PARTS

100%
LEAD FREE

P-133-B-SS

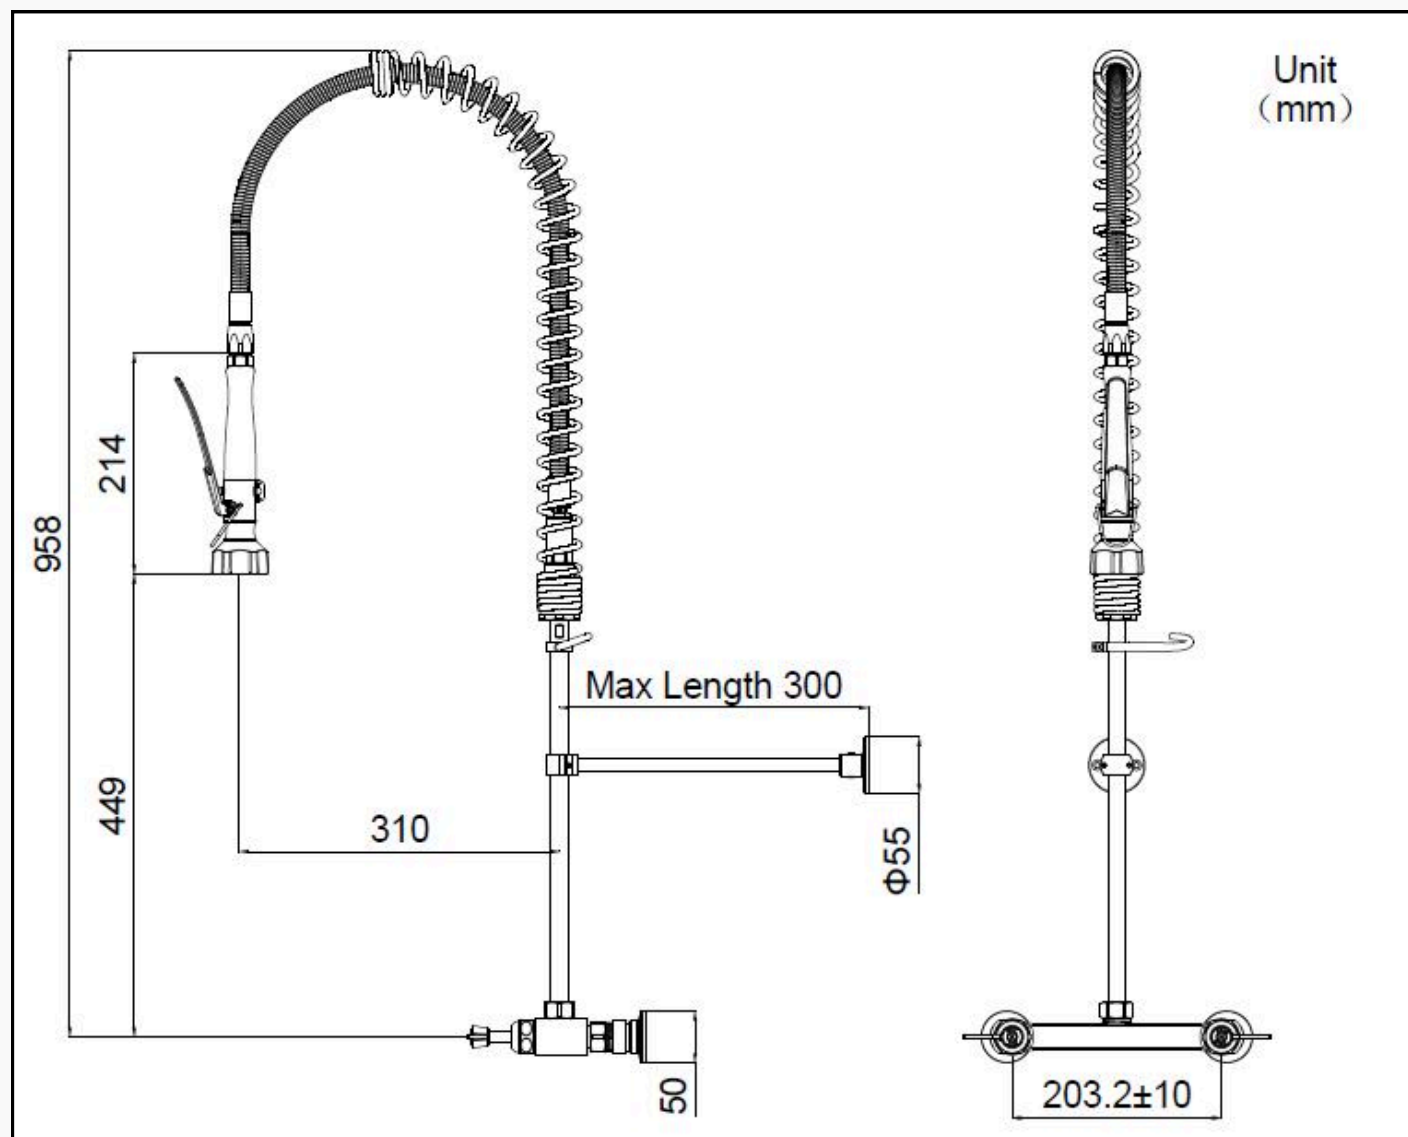

P-133-B-SS

Dual Holes Wall Mount Pre Rinse Faucet

1. **Temperature Control:** Dual-handle, dual-control for hot and cold adjustment
2. **Hole Size:** G1/2, Hole-to-hole Dimension 8" (203.2±10 mm)
3. **Body Material, Valve Core, Overhead Spring:** 304 S/S
4. **Spray Valve:** Available in Stainless Steel Dual function or Single-function Options
5. **Hose:** Stainless Steel 360° Rotating and Universal Ball Joint (925 mm)


6. **Neoperl Aerator Water Flow:** Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) options
7. **Wall Bracket:** Adjustable Range 300 mm
8. **Temperature Max:** 95°C(203°F)
9. **Pressure Max:** 2.5 Mpa (25 Bar)
10. **Life Span:** 200,000+ Cycles



100%
SUS304
WETTED PARTS

100%
LEAD FREE

P-133-ADF12-B-SS

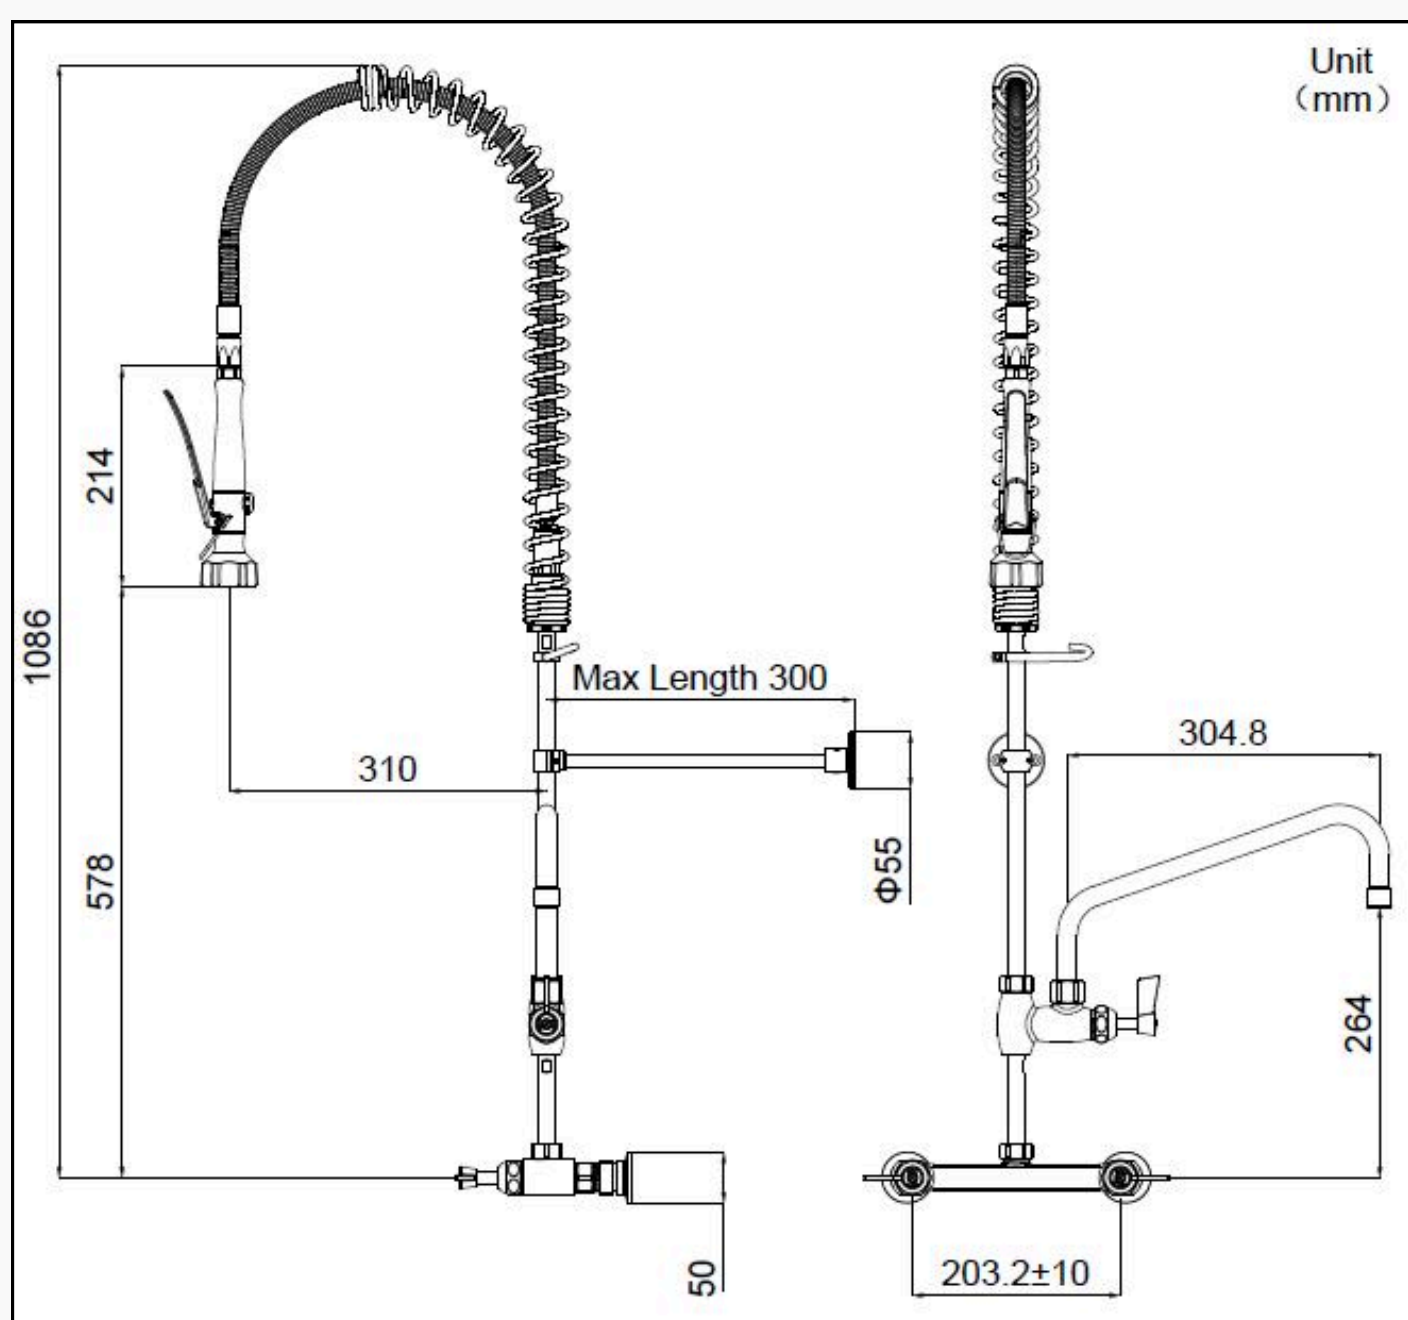

P-133-ADF12-B-SS

Dual Holes Wall Mount Pre Rinse Faucet

1. **Add-on Swing Nozzle:** 12 inches (304.8 mm)
2. Also available with 8" and 10" swing nozzles
3. **Temperature Control:** Dual-handle, dual-control for hot and cold adjustment
4. **Hole Size:** G1/2, Hole-to-hole Dimension 8" (203.2±10 mm)
5. **Body Material, Valve Core, Overhead Spring:** 304 S/S
6. **Spray Valve:** Available in Stainless Steel Dual function or Single-function Options

7. **Hose:** Stainless Steel 360° Rotating and Universal Ball Joint (925 mm)
8. **Neoperl Aerator Water Flow:** Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) options
9. **Wall Bracket:** Adjustable Range 300 mm
10. **Temperature Max:** 95°C(203°F)
11. **Pressure Max:** 2.5 Mpa (25 Bar)
12. **Life Span:** 200,000+ Cycles



STAINLESS STEEL MINI PRE-RINSE LINE




P-0113-ADF6-MINI-SS

Mini Style Deck Mount Pre Rinse Faucet

1. Add-on Swing Nozzle: 6 inches (152.4 mm)
2. Also available with 8" and 10" swing nozzles
3. **Temperature Control:** Dual-handle, dual-control for hot and cold adjustment
4. **Hole Size:** $\Phi 32-35$ mm
5. **Body Material, Valve Core, Overhead Spring:** 304 S/S
6. **Spray Valve:** Available in Stainless Steel Dual function or Single-function Options



P-0113-ADF6-MINI-SS

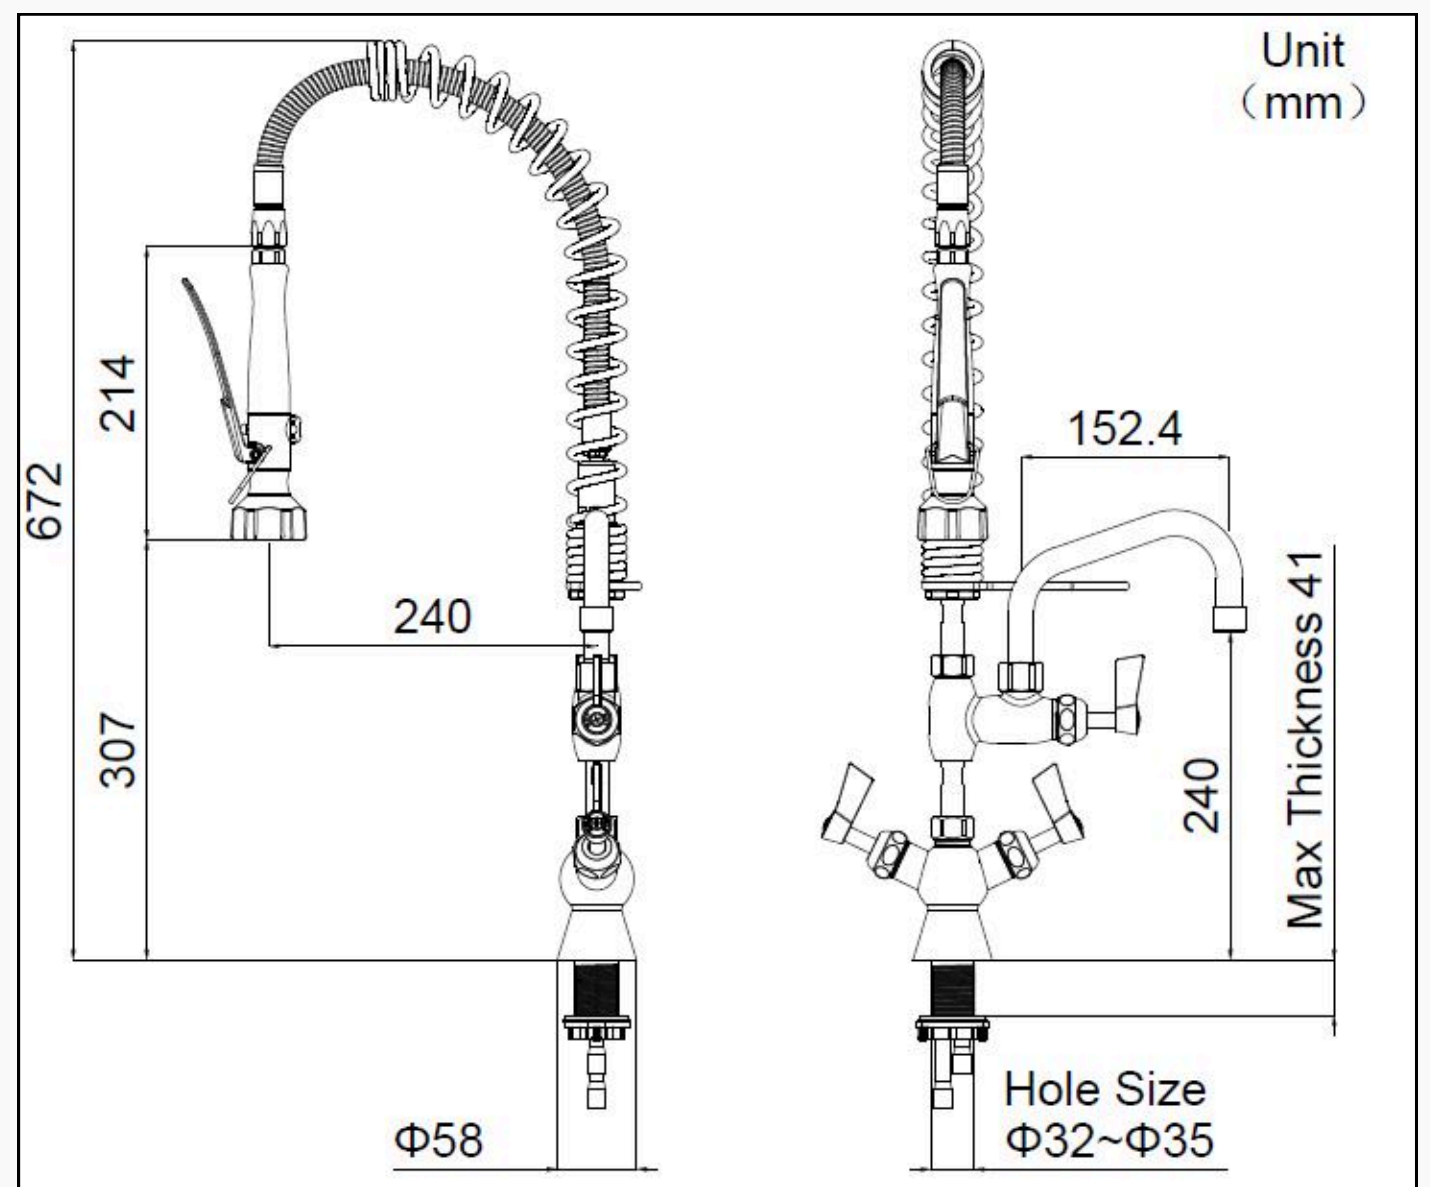

7. **Hose:** Stainless Steel 360° Rotating and Universal Ball Joint (925 mm)
8. **Neoperl Aerator Water Flow:** Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) options
9. **Wall Bracket:** Adjustable Range 300 mm
10. **Temperature Max:** 95°C(203°F)
11. **Pressure Max:** 2.5 Mpa (25 Bar)
12. **Life Span:** 200,000+ Cycles




P-2285-ADF6-MINI-SS

Mini Style Deck Mount Pre Rinse Faucet

1. Add-on Swing Nozzle: 6 inches (152.4 mm)
2. Also available with 8" and 10" swing nozzles
3. **Temperature Control:** Single-handle, single-control for cold water only
4. **Hole Size:** $\Phi 21-23$ mm
5. **Body Material, Valve Core, Overhead Spring:** 304 S/S
6. **Spray Valve:** Available in Stainless Steel Dual function or Single-function Options



P-2285-ADF6-MINI-SS

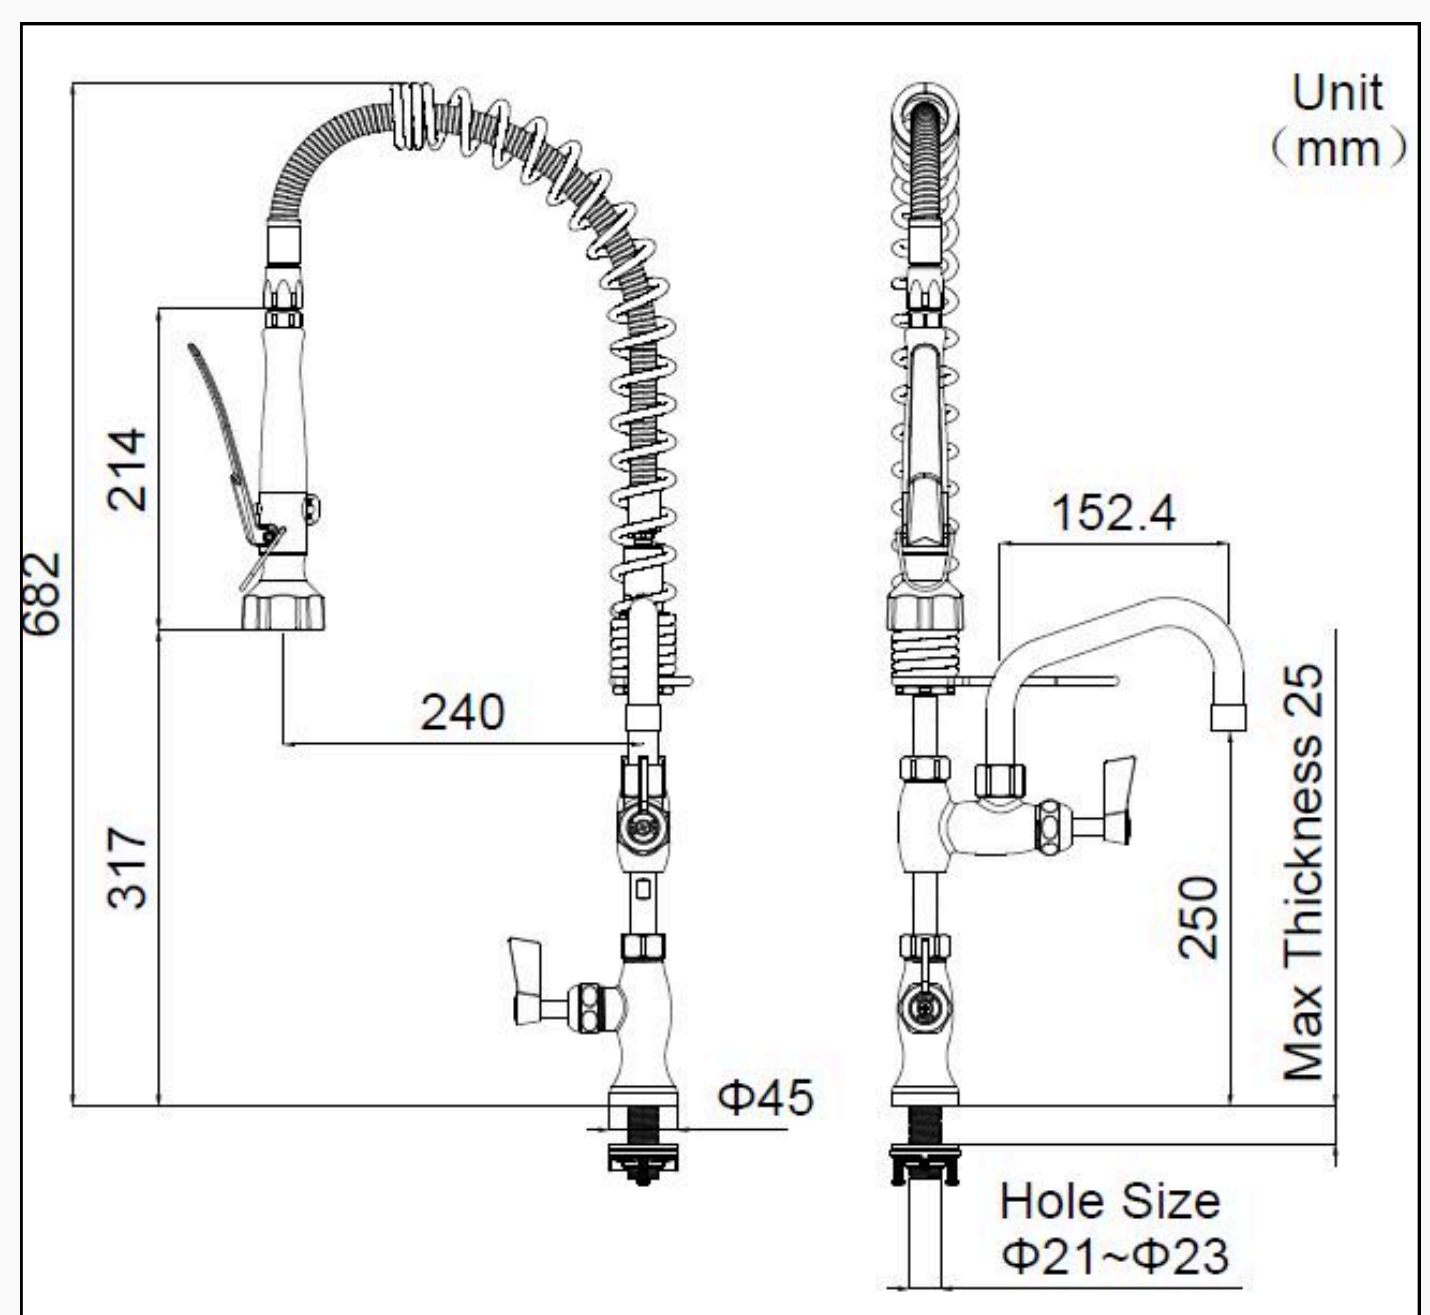

7. **Hose:** Stainless Steel 360° Rotating and Universal Ball Joint (925 mm)
8. **Neoperl Aerator Water Flow:** Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) options
9. **Wall Bracket:** Adjustable Range 300 mm
10. **Temperature Max:** 95°C(203°F)
11. **Pressure Max:** 2.5 Mpa (25 Bar)
12. **Life Span:** 200,000+ Cycles



SPRAY VALVES



P-107-SS

Patented Dual-function Spray Valve

1. Dual-function Features:

- **Two Modes:** Offers powerful washing and large-area washing.
- **Uniform Coverage:** Features 24 precisely designed angles to ensure uniform flow and broad coverage.
- **Piping Protection:** Reduces water hammer to protect water piping.
- **Ergonomic Design:** Includes an ergonomic hydraulic buffer that reduces fatigue during extended use.

2. Material:

- Constructed from SUS304 stainless steel, rated for over 200,000 cycles.

P-107-SSE


Single-function Spray Valve

1. Single-function Features:

- **Mode:** Provides a single mode for powerful washing.
- **Piping Protection:** Reduces water hammer to protect water piping.
- **Ergonomic Design:** Includes an ergonomic hydraulic buffer that reduces fatigue during extended use.

2. Material:


- Constructed from SUS304 and rated for up to 200,000+ cycles.

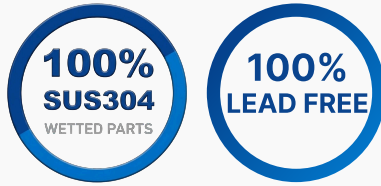

BQH-106C

Café Budget Quality Hob Mounted Pre-rinse Mixer with 6" Pot Filler


1. Deck mounted type, 6" swing nozzle
2. Dual hole(hot & cold), Dual-function SS304 spray gun (powerful washing + large area washing)
3. Maximum height 585mm, 144.5mm riser, $\Phi 18$ tube
4. 625mm stainless steel 304 flexible hose with 360°universal joint rotating head
5. The product includes check valve to prevent cross-flow

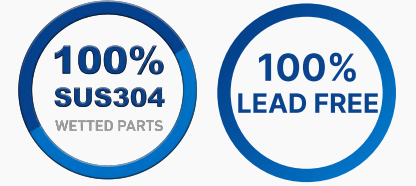

BQW-106C

Café Budget Quality Wall Mounted Pre-rinse Mixer with 6" Pot Filler


1. Wall mounted type, 6" swing nozzle
2. Dual hole(hot & cold), Dual-function SS304 spray gun (powerful washing + large area washing)
3. Maximum height 585mm, 144.5mm riser, $\Phi 18$ tube
4. 625mm stainless steel 304 flexible hose with 360°universal joint rotating head
5. The product includes check valve to prevent cross-flow

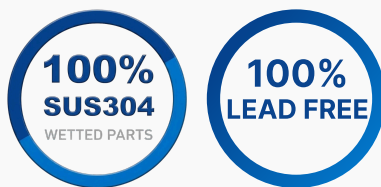

BQH-112

Budget Quality Hob Mounted Pre-rinse Mixer with 12" Pot Filler

1. Deck mounted type, 12" swing nozzle
2. Dual hole(hot & cold), Dual-function SS304 spray gun (powerful washing + large area washing)
3. Maximum height 1085mm, 504.5mm riser, $\Phi 18$ tube, $\Phi 55 \times L303$ mm wall bracket
4. 1000mm stainless steel 304 flexible hose with 360°universal joint rotating head
5. The product includes check valve to prevent cross-flow

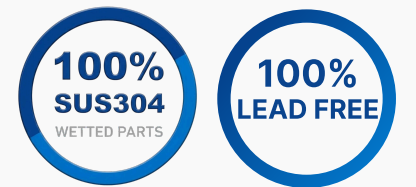



BQW-112

Budget Quality Wall Mounted Pre-rinse Mixer with 12" Pot Filler

1. Wall mounted type, 12" swing nozzle
2. Dual hole(hot & cold), Dual-function SS304 spray gun (powerful washing + large area washing)
3. Maximum height 1085mm, 504.5mm riser, $\Phi 18$ tube, $\Phi 55 \times L303$ mm wall bracket
4. 1000mm stainless steel 304 flexible hose with 360°universal joint rotating head
5. The product includes check valve to prevent cross-flow



STAINLESS STEEL FAUCETS

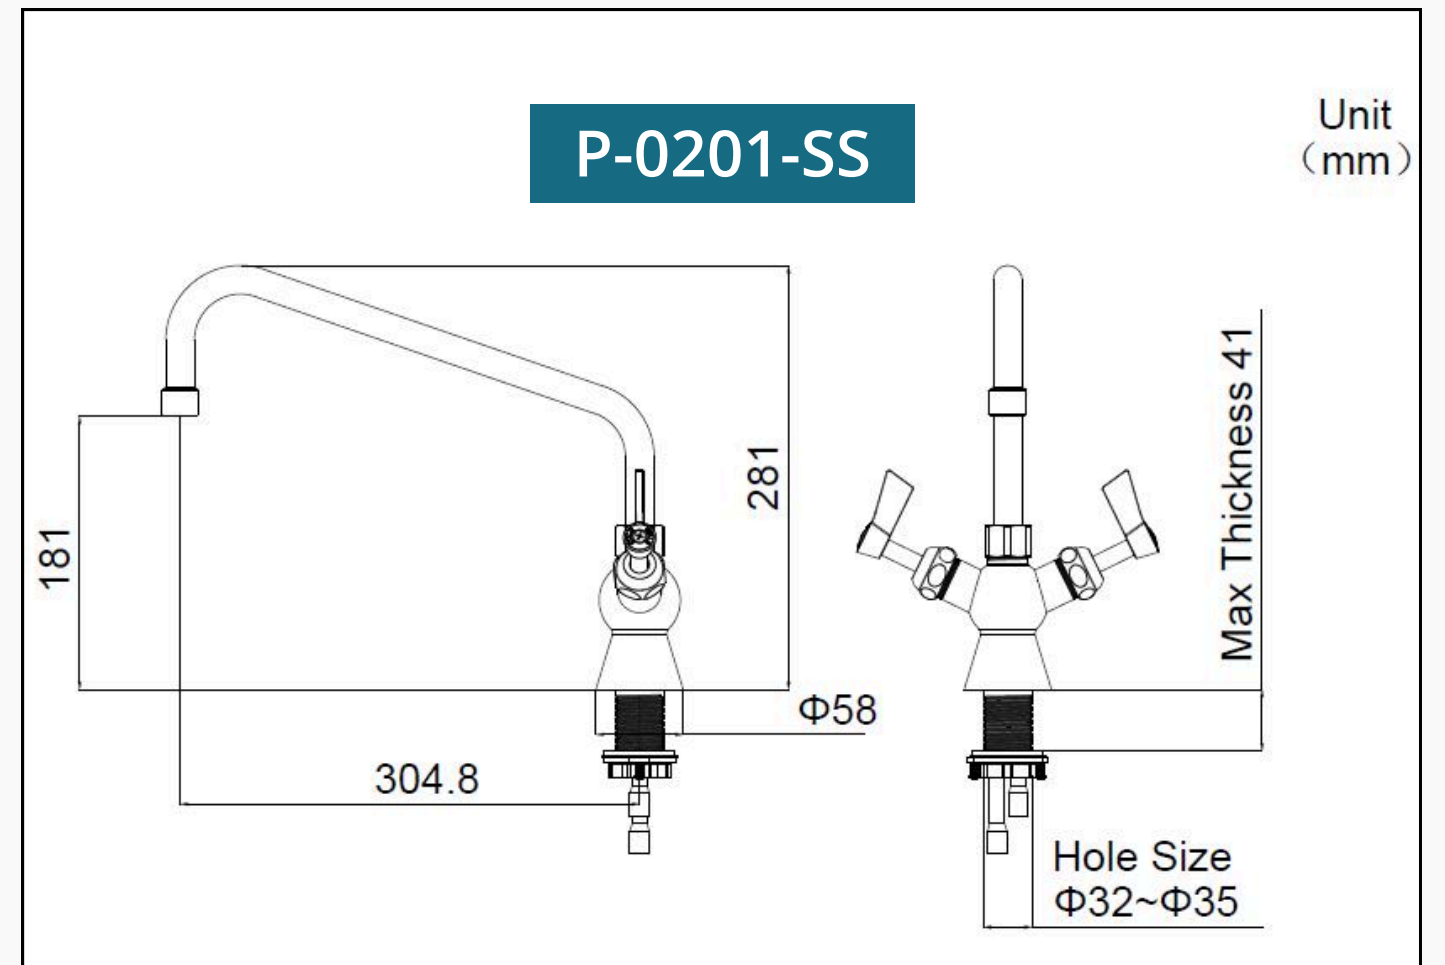
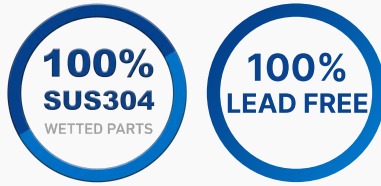


P-0201-SS

Deck Mount Stainless Steel Faucet

- 1. Swing Nozzle:** 12 inches (304.8 mm)
- 2.** Also available with 8" and 10" swing nozzles
- 3. Neoperl Aerator Water Flow:** Available in options of 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM)
- 4. Temperature Control:** Dual-handles for dual-control hot and cold adjustment
- 5. Hole Size:** Φ32-35 mm

*Standard unit 100% 304 s/s with optional 316 s/s available upon request.

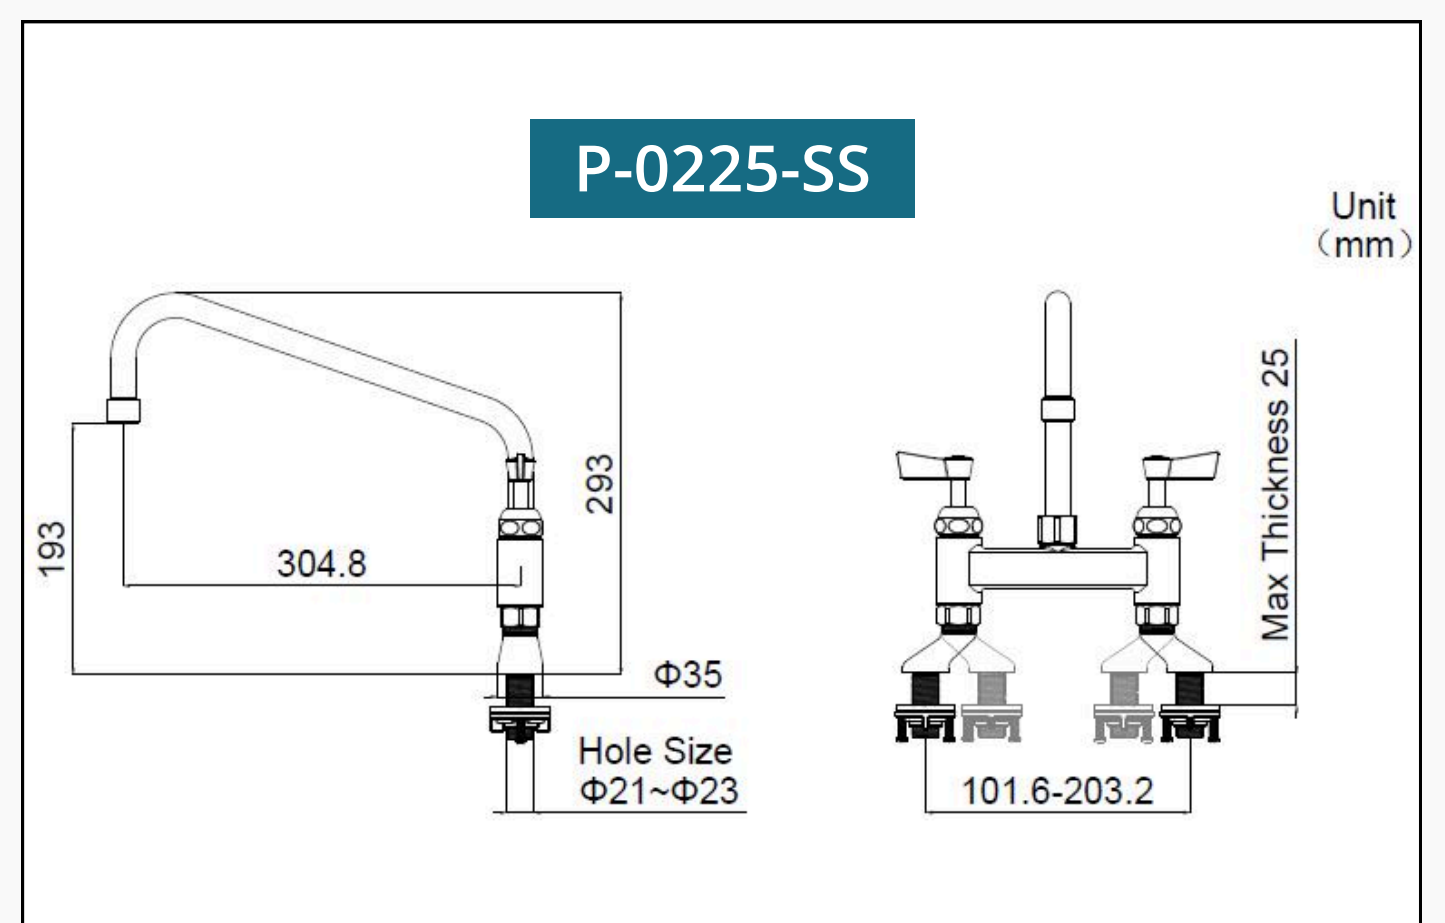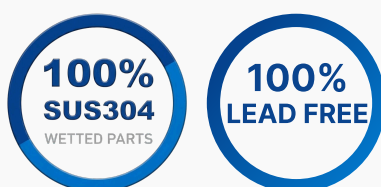

P-0225-SS



Dual Deck Mount Stainless Steel Faucet

- 1. Swing Nozzle:** 12 inches (304.8 mm)
- 2.** Also available with 8" and 10" swing nozzles
- 3. Neoperl Aerator Water Flow:** Available in options of 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM)
- 4. Temperature Control:** Dual-handles for dual-control hot and cold adjustment
- 5. Hole Size:** Φ21-23 mm, Hole-to-hole Dimension 4" (101.6 mm) - 8" (203.2 mm)

*Standard unit 100% 304 s/s with optional 316 s/s available upon request.



STAINLESS STEEL FAUCETS

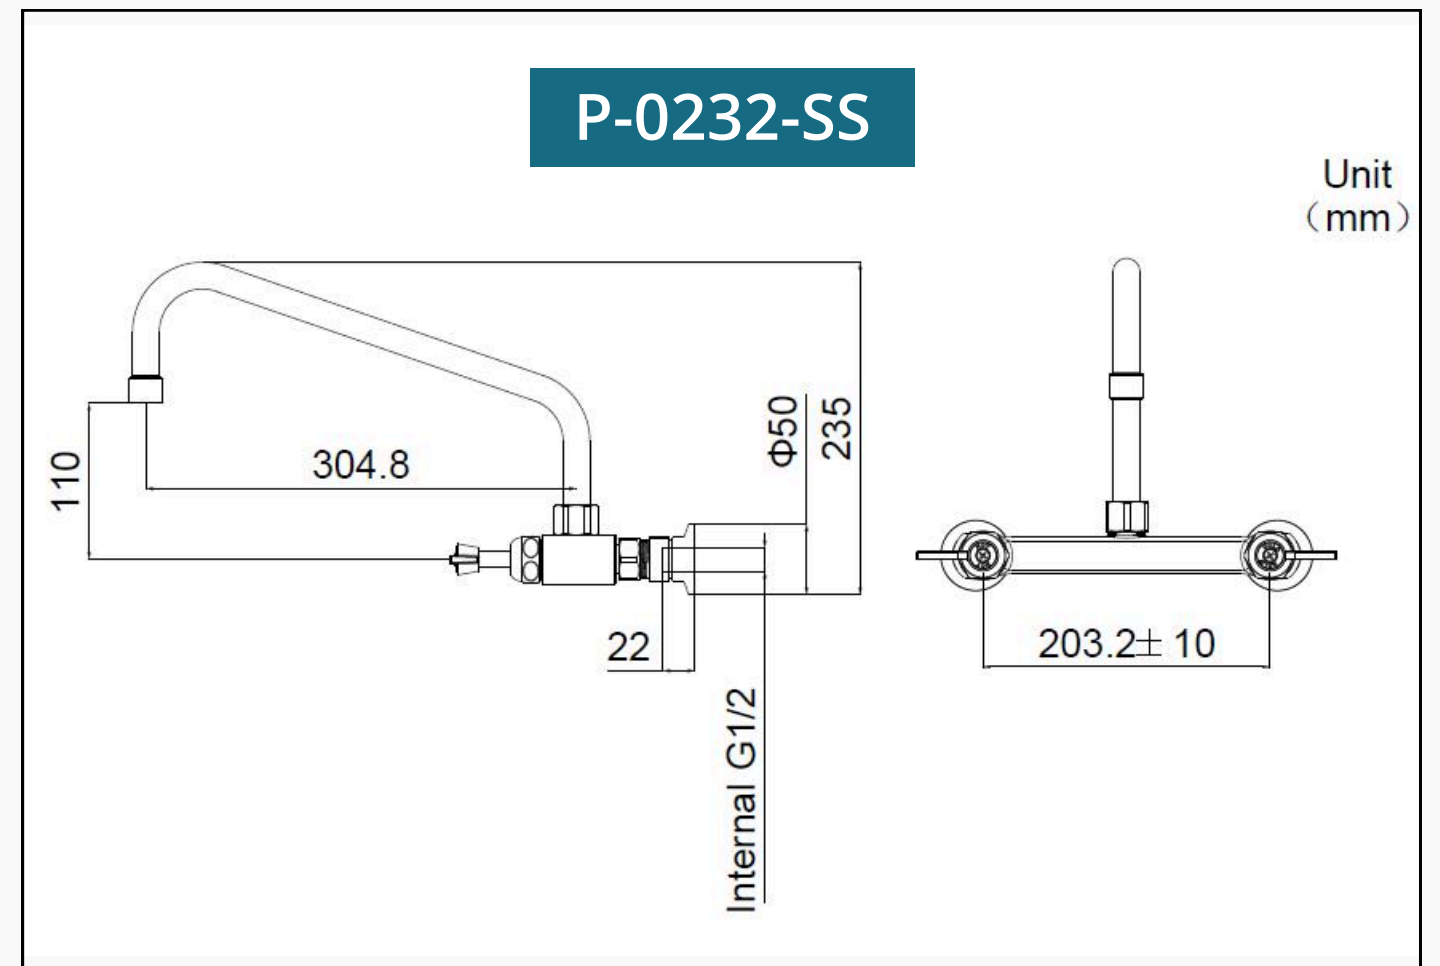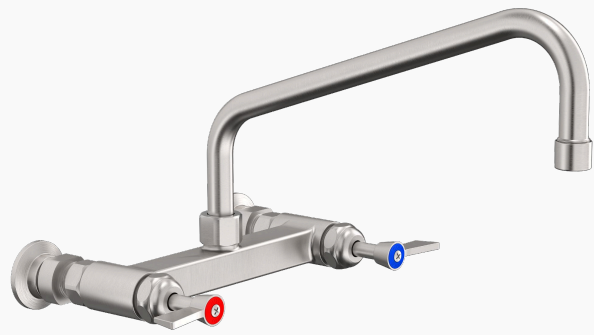


P-0232-SS

Wall Mount Stainless Steel Faucet

- 1. Swing Nozzle:** 12 inches (304.8 mm)
- Also available with 8" and 10" swing nozzles
- 3. Neoperl Aerator Water Flow:** Available in options of 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM)
- 4. Temperature Control:** Dual-handles for dual-control hot and cold adjustment
- 5. Hole Size:** G1/2, Hole-to-hole Dimension 8" (203.2±10 mm)

*Standard unit 100% 304 s/s with optional 316 s/s available upon request.

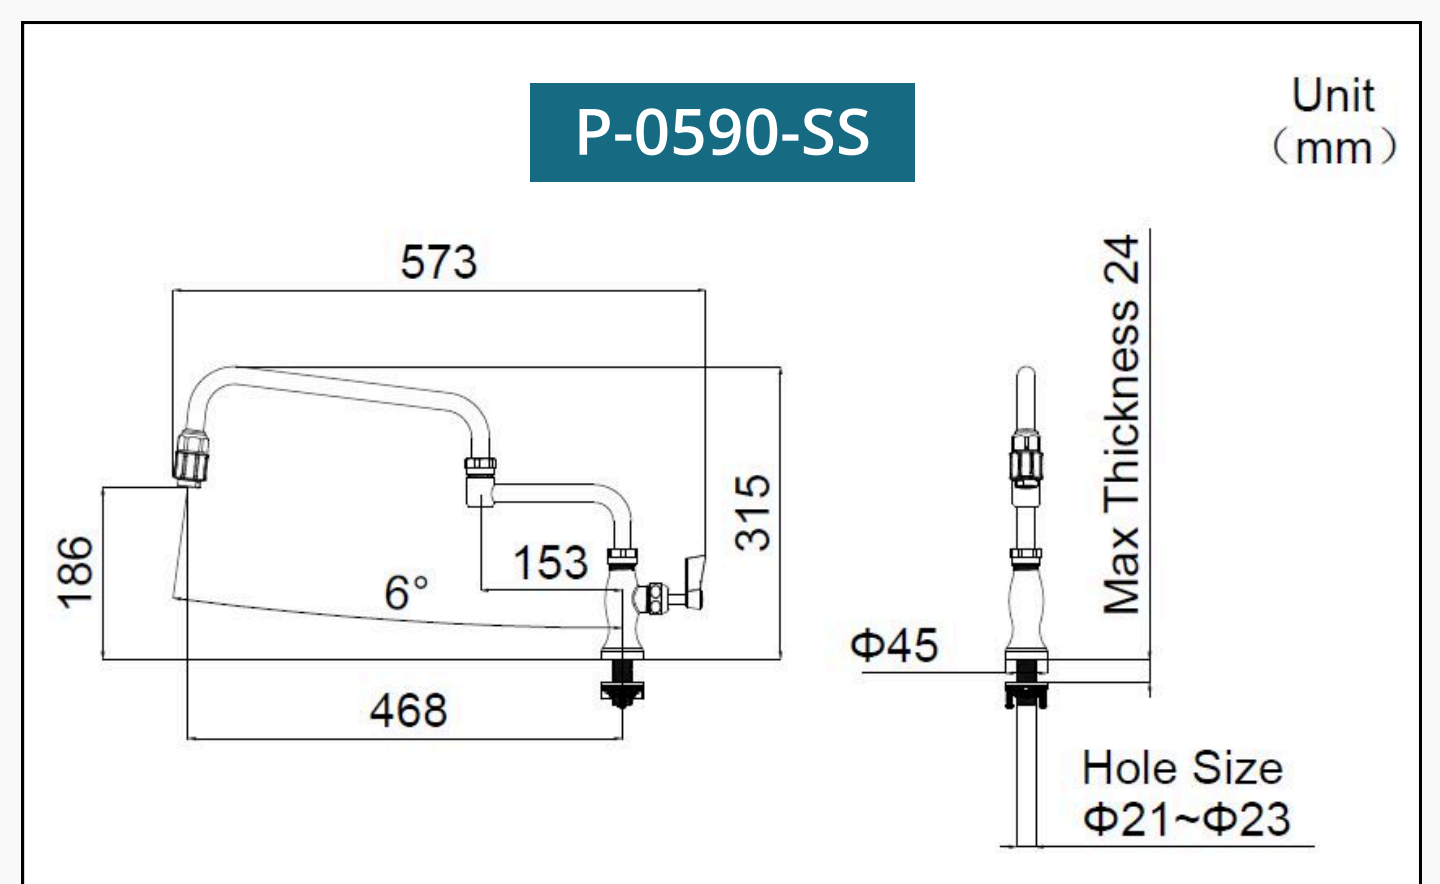

P-0590-SS


Deck Mount Stainless Steel Faucet

- 1. Swing Nozzle:** 18.43" (468 mm) dual-joint extended length
- 2. Neoperl Aerator Water Flow:** Unlimited flow
- 3. Temperature Control:** Single-handle, single-control cold water only
- 4. Hole Size:** Φ 21-23 mm

*Standard unit 100% 304 s/s with optional 316 s/s available upon request.



STAINLESS STEEL FAUCETS

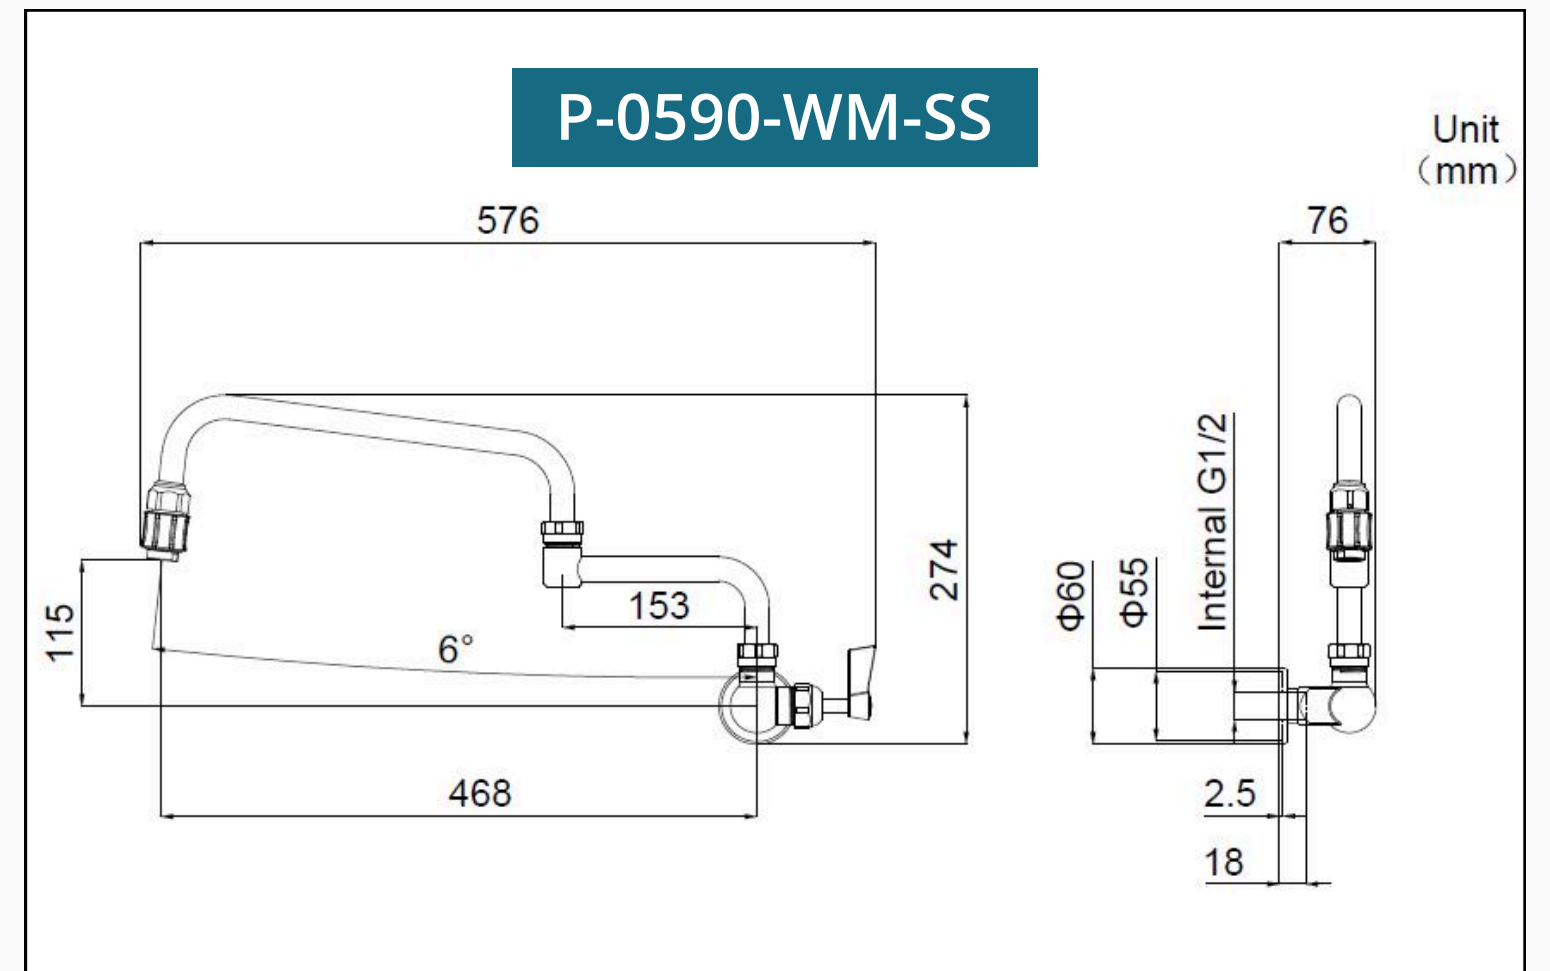


P-0590-WM-SS

Wall Mount Stainless Steel Faucet

1. Swing Nozzle: 18.43" (468 mm) dual-joint extended length
2. Neoperl Aerator Water Flow: Unlimited flow
3. Temperature Control: Single-handle, single-control cold water only
4. Hole Size: G1/2

*Standard unit 100% 304 s/s with optional 316 s/s available upon request.

ECONOMY SERIES

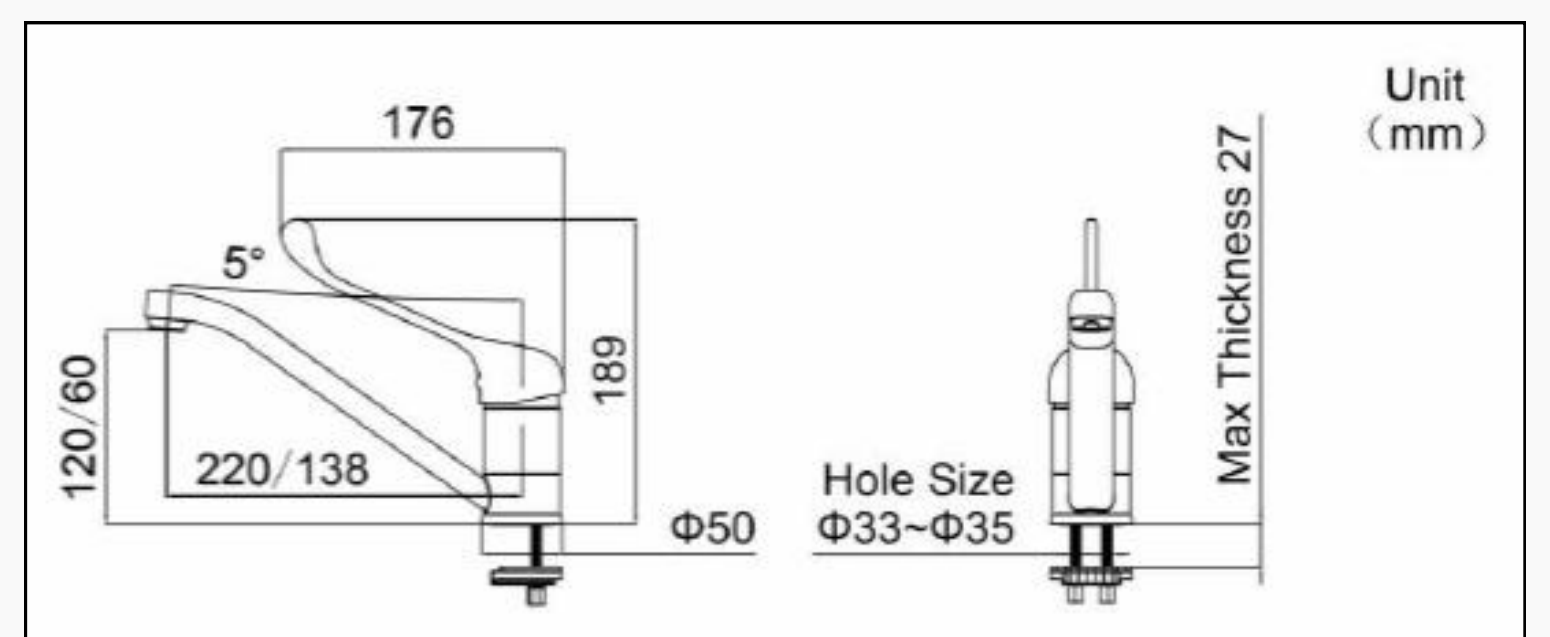

BWSLMIX

Deck Mount Manual Faucet with Extended Lever Handle

1. Swing Nozzle: 138mm / 220mm
2. Neoperl Aerator Water Flow: Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
3. Temperature Control: Single-handle Dual-control Hot and Cold Adjustment
4. Hole Size: Φ32-35 mm

*Standard unit 100% 304 s/s with optional 316 s/s available upon request.



HIGH QUALITY, HIGH VALUE EQUIPMENT SINCE 1993

Visit Us:



Sales & Service Center
POWERLINE EQUIPMENT COMPANY

B-2-11, Jalan SS 25/22
Taman Mayang, 47301 Petaling Jaya
Selangor, Malaysia

Tel: +603-7880 5758

www.powerlineequip.com

Please scan QR code
for standard faucet:

